



1. Remove the cover from the housing through gently pulling it forward.

2. Open the housing with a flat screwdriver.


3. Remove the transparent bracket and put it aside.



4. Unscrew the five screws from the circuit board.

5. Carefully remove the circuit board, the white frame, the lense, the display with the conductive rubber.

6. Now remove the protective film from the new display on both sides. Clean the contact surfaces of the display carefully.

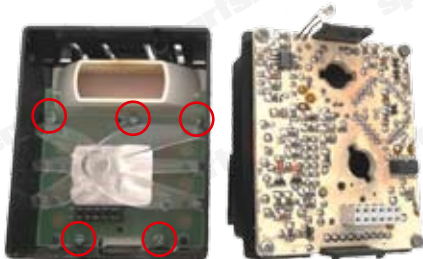

The contact surfaces to the display, as well as between the conductive rubber and display must be absolutely dry and free of dust. If necessary use the cleaning cloth provided.

7. Installation order of new display:

Insert display, insert conductive rubber, insert len, insert white frame.

8. Screw the circuit board, insert the transparent bracket, clip together the housing and put on the cover.

